




REV	DATE	DESCRIPTION
B	2013-3-7	增加Type A

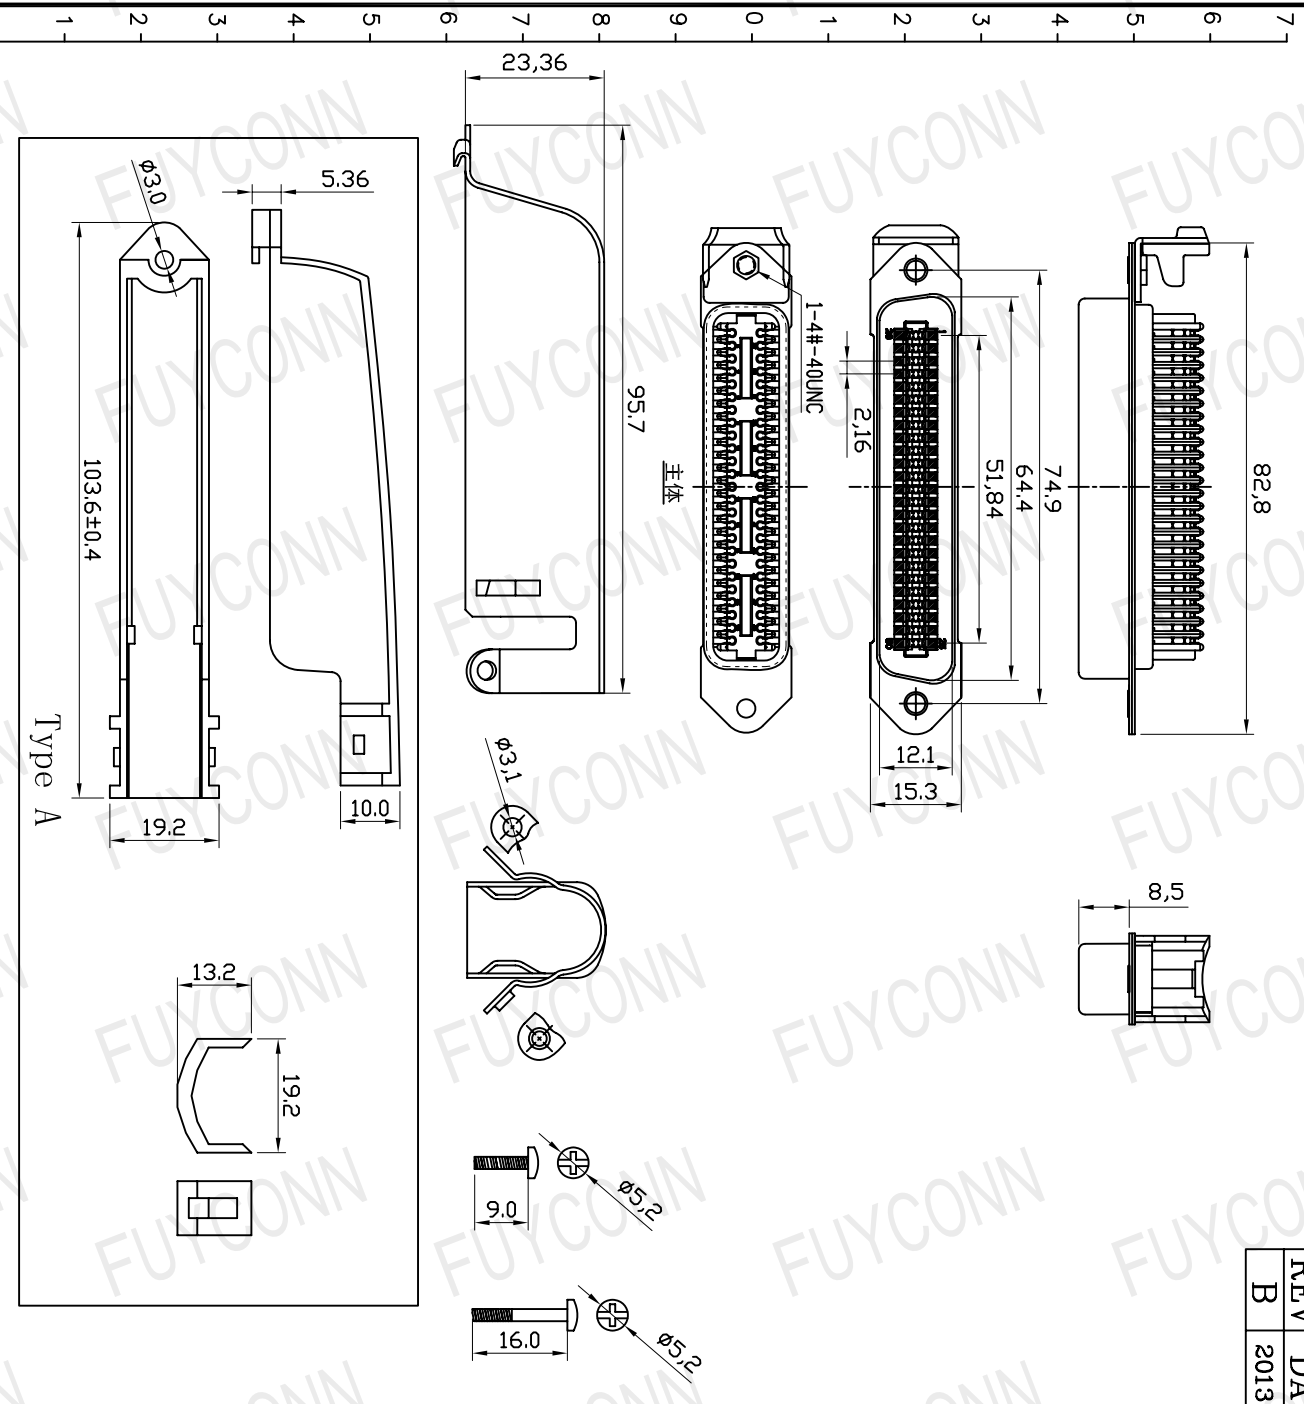

Material & finish
SHELL:

steel
Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0
CURRENT RATING: 5Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ MIN. (at 500V DC)
CONTACT RESISTANCE: 25mΩ Max. mated
TEMPERATURE:
-55°C to +105°C

57R1 50 P * * A * 036

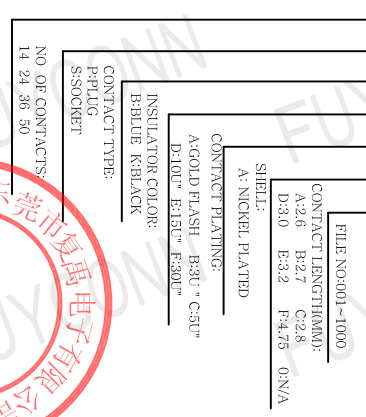

UNIT: mm

FUYCONN 东莞市复禹电子有限公司 DONG GUAN FUYCONN ELECTRONICS CO., LTD		MODEL NAME: 57-50P公单芯刺破X型 +70500大铁壳		PART NO: 57R150P**A*036 APPROVED BY: CHECKED BY: DRAW BY: 韦锋 DATE: 2013-3-7		FILE NO: FUY57036 SCALE: 1:1	
SELECT	1	2	3	EXTRA	✓	✓	✓
TOL	0.05	0.05	0.10				
DN	0.000	0.10	0.15	0.20	✓	✓	✓
ANGLE	0	0.25	0.30	0.40	✓	✓	✓